

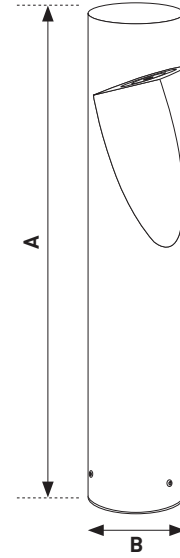




Callisto

IP66 IK06 CRI >80

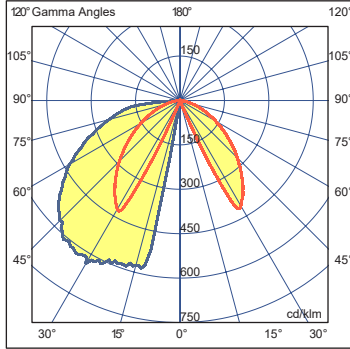

Color Options

RAL 7016
Anthracite Grey

RAL 9005
Black

RAL 9006
White Aluminium

RAL 7022
Umbra Grey

RAL 9016
White

RAL xxxx
Optional

	A	B	Power
LGT.30.106.01	300	150	10 W
LGT.30.106.02	500	150	10 W
LGT.30.106.03	750	150	15 W
LGT.30.106.04	1000	150	15 W
LGT.30.106.05	1500	150	20 W
LGT.30.106.06	2000	150	20 W

Technical Details (Felix Module)

Module luminous efficiency : 121 lm/W

Luminaire luminous efficiency : 76,73 lm/W (4000k)

Cct : 2700K - 3000K - 4000K - 6500K

Color Rendering Index : >80

Power Factor : Cos ϕ > 0,9

Led Life Time - L70 : > 72.000 hours @Ta= 45 °C

Operating Temperature Range : -20 °C / +45 °C

Input Voltage : 220-240(V) 50-60(Hz)

Driver : On/Off

Extruded aluminum body
Tempered glass
Steel flange with galvanized
Chromate conversion
Electrostatic powder coating
Stainless steel screws (grade 304)
Mechanical impact resistance IK06
Protection Grade IP66
Electrical installation Class I

Ekstrüzyon alüminyum gövde
Temperli cam
Galvanizli çelik flanş
Kromat kaplama
Elektrostatik toz boya
Paslanmaz vida (grade 304)
Mekanik darbe dayanımı IK06
Koruma sınıfı IP66
İzolasyon sınıfı Class I