


	A	B	Power
LGT.30.109.01	1000	250	10 W
LGT.30.109.02	1000	250	15 W
LGT.30.109.03	1000	250	20 W

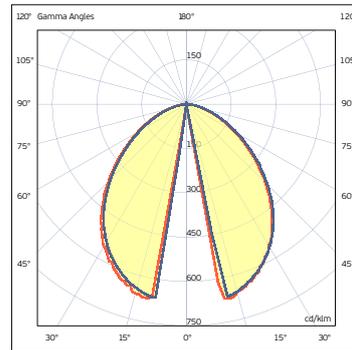

Description

- Corrosion resistant cast aluminum luminaire and body
- Tempered glass diffuser
- Galvanized steel flange
- Chromate conversion
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Mechanical impact resistance IK06
- Protection Grade IP66
- Electrical installation Class I

Color Options



Technical details

- Module luminous efficiency : 121 lm/W
- Luminaire luminous efficiency : 72,77 lm/W (4000k)
- Cct : 2700K - 3000K - 4000K - 6500K
- Input Voltage : 220-240(V) 50-60(Hz)
- Color Rendering Index : >80
- Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
- Operating Temperature Range : -20 °C / +45 °C Control Systems: On/Off / DALI

Options

- DALI controllable
- Double powder coating