
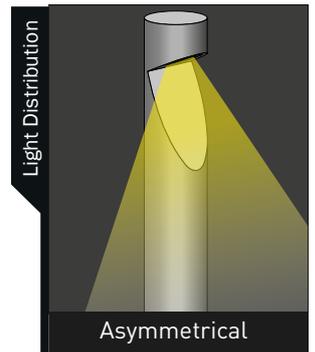


	A	B	Power
LGT.30.107.01	300	150	10 W
LGT.30.107.02	500	150	10 W
LGT.30.107.03	750	150	15 W
LGT.30.107.04	1000	150	15 W
LGT.30.107.05	1500	150	20 W
LGT.30.107.06	2000	150	20 W

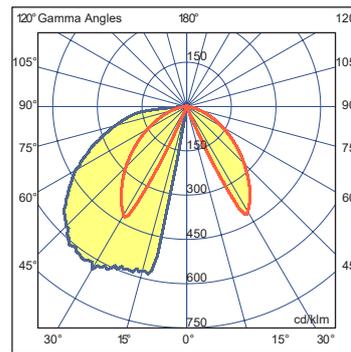

Description

- Corrosion resistant aluminum body
- Tempered glass diffuser
- Galvanized steel flange
- Mechanical impact resistance IK08
- Protection Grade IP66
- Chromate conversion pretreatment
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Electrical installation Class I

Color Options

- RAL 7016 Anthracite Grey
- RAL 9005 Black
- RAL 9006 White Aluminium
- RAL 7022 Umbra Grey
- RAL 9016 White
- RAL xxxx Optional

Technical details

- Module luminous efficiency : 121 lm/W
- Luminaire luminous efficiency : 76,82 lm/W (4000k)
- Cct : 2700K - 3000K - 4000K - 6500K
- Input Voltage : 220-240(V) 50-60(Hz)
- Control Systems: On/Off / DALI
- Color Rendering Index : >80
- Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
- Operating Temperature Range : -20 °C / +45 °C

Options

- DALI controllable
- Double powder coating