
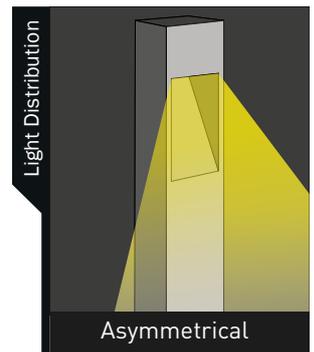


	A	B	C	Power
LGT.30.105.01	500	150	100	15 W
LGT.30.105.02	750	150	100	15 W
LGT.30.105.03	1000	150	100	15 W
LGT.30.105.04	1500	150	100	20 W
LGT.30.105.05	2000	150	100	20 W
LGT.30.105.06	2500	150	100	20 W

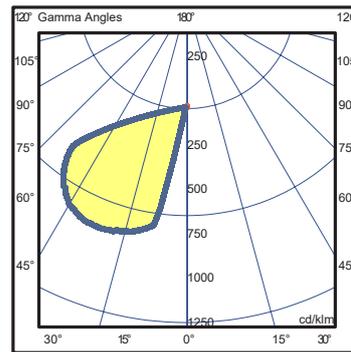

### Description

Corrosion resistant aluminum body  
 Tempered glass diffuser  
 Galvanized steel flange  
 Mechanical impact resistance IK08  
 Protection Grade IP66  
 Chromate conversion pretreatment  
 Electrostatic powder coating  
 Stainless steel screws (grade 304)  
 Electrical installation Class I

### Color Options



### Technical details

Module luminous efficiency : 121 lm/W  
 Luminaire luminous efficiency : 51,72 lm/W (4000k)  
 Cct : 2700K - 3000K - 4000K - 6500K  
 Input Voltage : 220-240(V) 50-60(Hz)  
 Control Systems: On/Off / DALI  
 Color Rendering Index : >80  
 Led Life Time - L70 : > 72.000 hours @Ta= 45 °C  
 Operating Temperature Range : -20 °C / +45 °C

### Options

DALI controllable  
 Double powder coating