



	A	B	Power
LGT.30.104.01	500	150	10 W
LGT.30.104.02	750	150	15 W
LGT.30.104.03	1000	150	15 W
LGT.30.104.04	1500	150	20 W
LGT.30.104.05	2000	150	20 W
LGT.30.104.06	2500	150	20 W



Product Description

Corrosion resistant aluminum body
 Chromate conversion pretreatment
 Electrostatic powder coating
 Stainless steel screws (grade 304)
 Mechanical impact resistance IK08
 Protection Grade IP66
 Electrical installation Class I

Options

DALI controllable

Dimensions

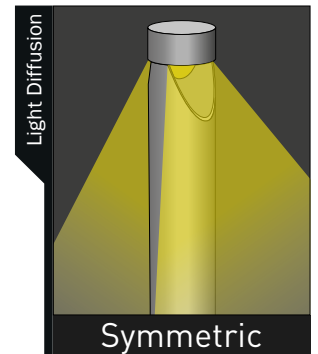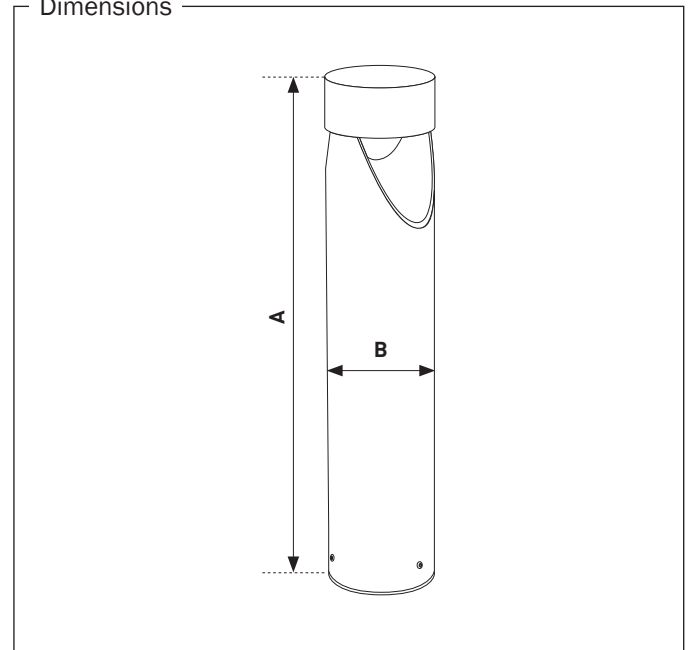

Lamp & Optics

Lumen : Up to 140 lm/w
 Kelvin : 3000K - 4000K - 6500K
 Input : 220-240(V) 50-60(Hz)
 Driver : On/Off

Color Options

