
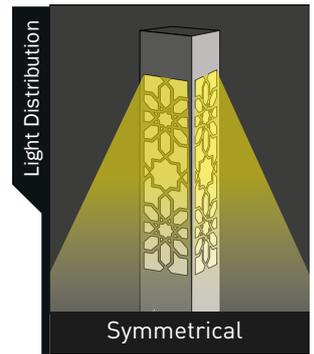


	A	B	C	Power
LGT.30.100.01	500	150	150	15 W
LGT.30.100.02	750	150	150	15 W
LGT.30.100.03	1000	150	150	15 W
LGT.30.100.04	1500	150	150	20 W
LGT.30.100.05	2000	150	150	20 W
LGT.30.100.06	2500	150	150	20 W

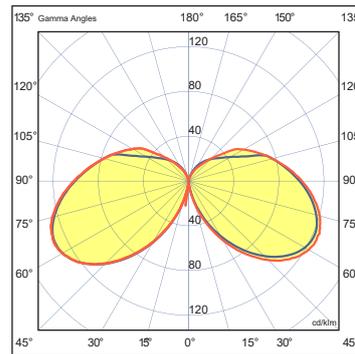

Description

Corrosion resistant aluminum body
 PMMA Glass Diffuser Option (Opal,Clear)
 Galvanized steel flange
 Mechanical impact resistance IK08
 Protection Grade IP66
 Chromate conversion pretreatment
 Electrostatic powder coating
 Stainless steel screws (grade 304)
 Electrical installation Class I

Color Options



Technical details

Module luminous efficiency : 121 lm/W
 Luminaire luminous efficiency : 37,52 lm/W (4000k)
 Cct : 2700K - 3000K - 4000K - 6500K
 Input Voltage : 220-240(V) 50-60(Hz)
 Control Systems: On/Off / DALI
 Color Rendering Index : >80
 Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
 Operating Temperature Range : -20 °C / +45 °C

Options

DALI controllable
 Double powder coating