


	A	BxC	D	Power
LGT.10.104.10	3000	80x150	1280	2 x 35W
LGT.10.104.11	4000	100x150	1800	2 x 35W
LGT.10.104.12	5000	100x150	1800	2 x 70W
LGT.10.104.13	6000	100x200	2100	2 x 70W

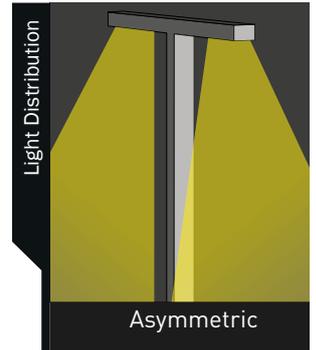

Product Description

Corrosion resistant aluminum body
 PMMA Lens Diffuser
 Mechanical impact resistance IK08
 Protection Grade IP66
 Chromate conversion pretreatment
 Electrostatic powder coating
 Stainless steel screws (grade 304)
 Electrical installation Class I
 Poles are supplied without anchor set
 Flange cover can be ordered separately.

Options

DALI controllable

Technical Details

Module luminous efficiency : 135 lm/W
 Luminaire luminous efficiency : 116 lm/W (4000k)
 Input Voltage-Frequency: 220-240(V) 50-60(Hz)
 Cct : 2700K - 3000K - 4000K - 6500K
 Color Rendering Index : >80
 Led Life Time - L70 : > 60.000 hours @Ta= 45 °C
 Operating Temperature Range : -20 °C / +45 °C
 Control Systems: On/Off / DALI

Color Options

