


	A	D	BxC	Power
LGT.10.104.01	3000	680	80 x 150	35 W
LGT.10.104.02	4000	950	100 x 150	35 W
LGT.10.104.03	5000	950	100 x 150	70 W
LGT.10.104.04	6000	1100	100 x 200	70 W

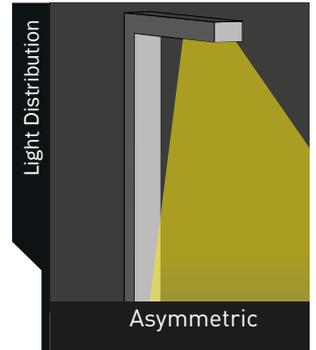

Product Description

Corrosion resistant aluminum body
 PMMA Lens Diffuser
 Mechanical impact resistance IK08
 Protection Grade IP66
 Chromate conversion pretreatment
 Electrostatic powder coating
 Stainless steel screws (grade 304)
 Electrical installation Class I
 Poles are supplied without anchor set
 Flange cover can be ordered separately.

Options

DALI controllable

Technical Details

Module luminous efficiency : 135 lm/W
 Luminaire luminous efficiency : 116 lm/W (4000k)
 Input Voltage-Frequency: 220-240(V) 50-60(Hz)
 Cct : 2700K - 3000K - 4000K - 6500K
 Color Rendering Index : >80
 Led Life Time - L70 : > 60.000 hours @Ta= 45 °C
 Operating Temperature Range : -20 °C / +45 °C
 Control Systems: On/Off / DALI

Color Options

