


	A	B x C	Power
LGT.10.106.01	3000	80 x 150	35 W
LGT.10.106.02	4000	100 x 150	35 W
LGT.10.106.03	5000	100 x 150	70 W
LGT.10.106.04	6000	100 x 200	70 W

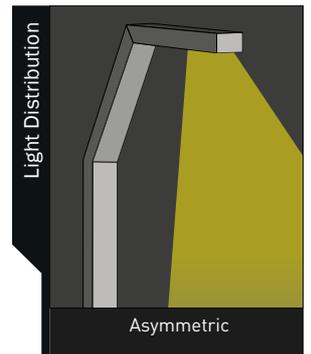

### Product Description

Corrosion resistant aluminum body  
 PMMA Lens Diffuser  
 Mechanical impact resistance IK08  
 Protection Grade IP66  
 Chromate conversion pretreatment  
 Electrostatic powder coating  
 Stainless steel screws (grade 304)  
 Electrical installation Class I  
 Poles are supplied without anchor set  
 Flange cover can be ordered separately.

### Options

DALI controllable

### Technical Details

Module luminous efficiency : 135 lm/W  
 Luminaire luminous efficiency : 116 lm/W (4000k)  
 Input Voltage-Frequency: 220-240(V) 50-60(Hz)  
 Cct : 2700K - 3000K - 4000K - 6500K  
 Color Rendering Index : >80  
 Led Life Time - L70 : > 60.000 hours @Ta= 45 °C  
 Operating Temperature Range : -20 °C / +45 °C  
 Control Systems: On/Off / DALI

### Color Options

