





	A	BxC	Power
LGT.10.106.10	3000	80x150	2 x 35W
LGT.10.106.11	4000	100x150	2 x 35W
LGT.10.106.12	5000	100x150	2 x 70W
LGT.10.106.13	6000	100x200	2x 70W

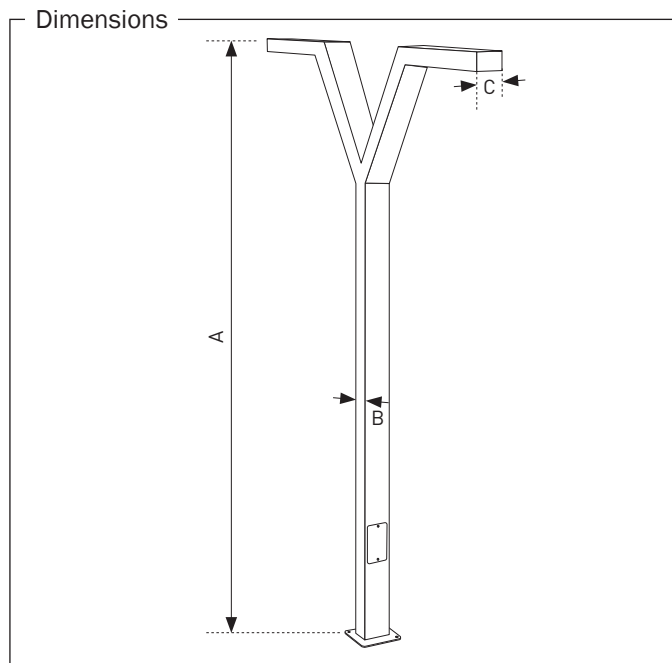

Product Description

Corrosion resistant aluminum body
PMMA Lens Diffuser
Mechanical impact resistance IK08
Protection Grade IP66
Chromate conversion pretreatment
Electrostatic powder coating
Stainless steel screws (grade 304)
Electrical installation Class I
Poles are supplied without anchor set
Flange cover can be ordered separately.

Options

DALI controllable

Technical Details

Module luminous efficiency : 135 lm/W
Luminaire luminous efficiency : 116 lm/W (4000k)
Input Voltage-Frequency: 220-240(V) 50-60(Hz)
Cct : 2700K - 3000K - 4000K - 6500K
Color Rendering Index : >80
Led Life Time - L70 : > 60.000 hours @Ta= 45 °C
Operating Temperature Range : -20 °C / +45 °C
Control Systems: On/Off / DALI

Color Options

