


Single	A	B	Power
LGT.10.108.01	4000	Ø114	1 x 22W
LGT.10.108.02	5000	Ø127	2 x 22W
LGT.10.108.03	6000	Ø139	3 x 22W
Double			
LGT.10.108.10	4000	Ø114	2 x 22W
LGT.10.108.11	5000	Ø127	4 x 22W
LGT.10.108.12	6000	Ø139	6 x 22W

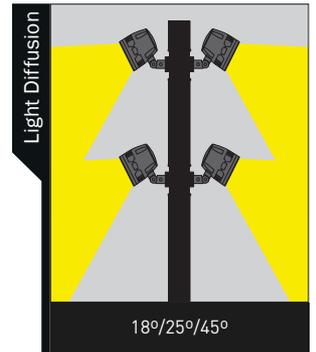

Product Description

Aluminum injection luminaire
Galvanized steel pole body
Tempered glass diffusor
Mechanical impact resistance IK08
Protection Grade IP66
Chromate conversion pretreatment
Electrostatic powder coating
Stainless steel screws (grade 304)
Electrical installation Class I
Poles are supplied without anchor set
Flange cover can be ordered separately.

Options

DALI controllable

Technical Details

Pluto Floodlight 22W
Luminaire luminous efficiency : 123 lm/W (4000k)
Input Voltage : 220-240(V) 50-60(Hz)
Control Systems: On/Off / DALI / 1-10V Dimming
Cct : 2700K - 3000K - 4000K - 6000K
Red - Green - Blue - Amber
Color Rendering Index : >80

Color Options

