


	A	CxD	Power
LGT.10.113.10	3000	80x150	2 x 35W
LGT.10.113.11	4000	100x150	2 x 35W
LGT.10.113.12	5000	100x150	2 x 70W
LGT.10.113.13	6000	100x200	2 x 70W

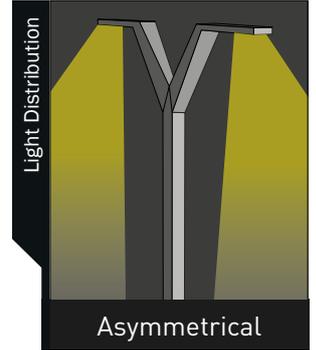

Product Description

- Corrosion resistant aluminum body
- PMMA Lens Diffuser
- Mechanical impact resistance IK08
- Protection Grade IP66
- Chromate conversion pretreatment
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Electrical installation Class I
- Poles are supplied without anchor set
- Flange cover can be ordered separately.

Options

- DALI controllable

Technical Details

- Module luminous efficiency : 135 lm/W Luminaire
- luminous efficiency : 116 lm/W (4000k) Input
- Voltage-Frequency: 220-240(V) 50-60(Hz) Cct : 2700K - 3000K - 4000K - 6500K
- Color Rendering Index : >80
- Led Life Time - L70 : > 60.000 hours @Ta= 45 °C
- Operating Temperature Range : -20 °C / +45 °C
- Control Systems: On/Off / DALI

Color Options

- RAL 7016 Anthracite Grey
- RAL 9005 Black
- RAL 9006 White Aluminium
- RAL 7022 Umbra Grey
- RAL 9016 White
- RAL xxxx Optional