


	A	B	C	Power
LGT.10.114.01	3500	460	90	42W
LGT.10.114.02	4000	460	90	42W

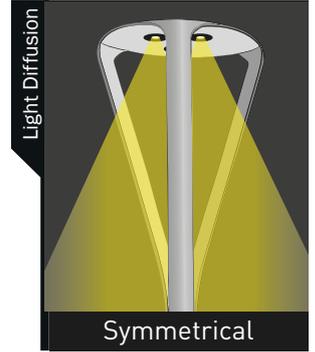

### Product Description

- Corrosion resistant cast aluminum luminaire
- Galvanized steel pole body
- Tempered glass diffuser
- Mechanical impact resistance IK08
- Protection Grade IP66
- Chromate conversion pretreatment
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Electrical installation Class I
- Poles are supplied without anchor set
- Flange cover can be ordered separately.

### Options

- DALI controllable

### Technical Details

- Module luminous efficiency : 121 lm/W
- Luminaire luminous efficiency : 72,77 lm/W
- (4000k) Input Voltage-Frequency: 220-240(V)
- 50-60(Hz) Cct : 2700K - 3000K - 4000K - 6500K
- Color Rendering Index : >80
- Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
- Operating Temperature Range : -20 °C / +45 °C
- Control Systems: On/Off

### Color Options

- RAL 7016 Anthracite Grey
- RAL 9005 Black
- RAL 9006 White Aluminium
- RAL 7022 Umbra Grey
- RAL 9016 White
- RAL xxxx Optional