




	A	B	C	Power
LGT.30.103.01	500	250	150	10 W
LGT.30.103.02	750	250	150	15 W
LGT.30.103.03	1000	250	150	15 W
LGT.30.103.04	1500	250	150	20 W
LGT.30.103.05	2000	250	150	20 W
LGT.30.103.06	2500	250	150	20 W




Description

Corrosion resistant aluminum body
Tempered glass diffuser
Galvanized steel flange
Mechanical impact resistance IK08
Protection Grade IP66
Chromate conversion pretreatment
Electrostatic powder coating
Stainless steel screws (grade 304)
Electrical installation Class I

Color Options

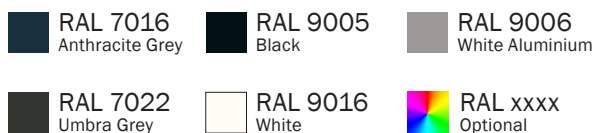

Dimensions

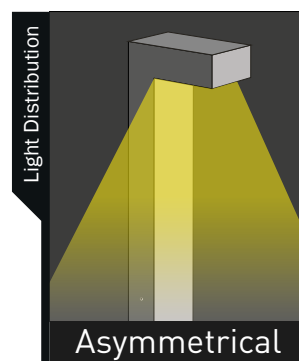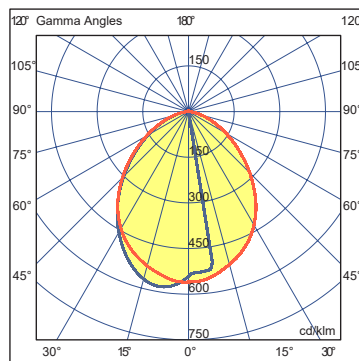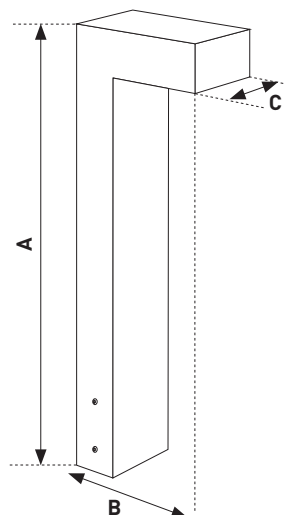

Technical details

Module luminous efficiency : 121 lm/W
Luminaire luminous efficiency : 81,92 lm/W (4000k)
Cct : 2700K - 3000K - 4000K - 6500K
Input Voltage : 220-240(V) 50-60(Hz)
Control Systems: On/Off / DALI
Color Rendering Index : >80
Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
Operating Temperature Range : -20 °C / +45 °C

Options

DALI controllable
Double powder coating