


	A	B	C	Power
LGT.30.101.01	500	150	150	10 W
LGT.30.101.02	750	150	150	15 W
LGT.30.101.03	1000	150	150	15 W
LGT.30.101.04	1500	150	150	20 W
LGT.30.101.05	2000	150	150	20 W
LGT.30.101.06	2500	150	150	20 W

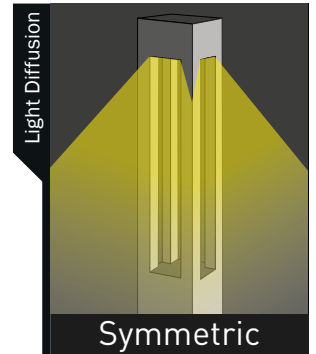

Product Description

- Corrosion resistant aluminum body
- Chromate conversion pretreatment
- 4mm Tempered Glass Diffuser
- Steel flange with galvanized
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Mechanical impact resistance IK06
- Protection Grade IP66
- Electrical installation Class I

Led & Optics

- Module luminous efficiency 121 lm/W
- Luminaire luminous efficiency 65,80 lm/W
- Cct : 2700K - 3000K - 4000K - 6500K
- Color Rendering Index : >80
- Power Factor : Cos ϕ > 0,9
- Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
- Operating Temperature Range : -20 °C / +45 °C
- Input Voltage : 220-240(V) 50-60(Hz)
- Driver : On/Off

Color Options

- RAL 7016 Anthracite Grey
- RAL 9005 Black
- RAL 9006 White Aluminium
- RAL 7022 Umbra Grey
- RAL 9016 White
- RAL xxxx Optional

Options

- DALI controllable
- Double powder coating